



EPA-EX1

LED Exit Sign



RoHS




INTRODUCTION

Epover Tech Exit Sign well known it's reliability, energy efficiency and ease installation. The cover is possible to include all diffuser combinations in one box for single or double sided applications.


Exit Sign can be surface mounted and the quick connect bracket makes installation convenience. In this case, making it versatile and suitable for most business settings.

FEATURES

- AS/NZS 2293.3 compliant.
- Ceiling or wall mount with easy slide connect.
- Long Life Time LiFePO4 battery.
- IC Control Intelligent System provided.
- Ideal for Commercial and Industrial application.
- Pictogram Replaceable.
- Maintained operation.

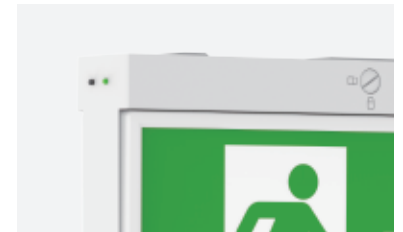

Dimension Unit:mm

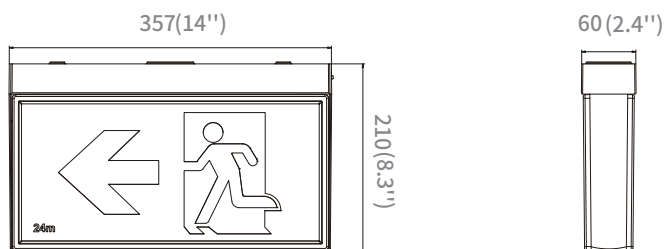

Model List

Model	EPA-EX1-MT-2H	EPA-EX1-AT-2H
Input Voltage	220-240V	220-240V
Output Power	1W max	1W max
Charge Duration	16H	16H
Discharge Duration	2H	2H
Battery	LiFePO4 3.2V600mAh	LiFePO4 3.2V600mAh
Test Mode	Manual Test	Auto Test

Driver Datasheet

Model	EPA-EX1
Frequency	50/60Hz
Discharge Efficiency	≥80%
Total load wattage	3W±0.5W
Power Factor	≥0.3
Output current range	240mA±10%
Short circuit protection	PASS
Over voltage protection	PASS
Surge	0.5KV
Withstand voltage	AC3750V

Technical Data Sheet

Model	EPA-EX1
Input Voltage(V)	220-240V
Output Power	1W Max
LED	SMD2835
CCT(K)	5000K
CRI	>80
LED Driver	Built-in
Protection Class	Class II
Fishing Color	Black/White
Material	ABS
Operating Temp(C)	0 C~45 C
Storage Temp(C)	0 C~65 C



▼ www.epowerem.com info@epowertech.cn TEL: +86-755 85272094 ▼

Add: 302, 6th Building, Hesheng Industrial park, FuHai Sub-district, Bao'an, Shenzhen, PRC